



# Ultrafabrics Digital Binder





# Breathable Technology

## Fabrics That Breathe

---

Available in a variety of grain styles, these materials provide the ultimate luxury and functionality. Engineered with a proprietary ventilation system to enhance softness, promote air circulation, and absorb unwanted noise, these fabrics breathe for the highest level of comfort and performance.



# Brisa — Ultrafabrics



533-3775 Mystic Beige



533-3775 Mystic Beige



533-3019 Birch



533-3863 Cream



533-3822 Bone



533-3946 New Sand



533-3051 Ginger



533-3276 Wishbone



533-3915 Putty



533-3823 Aztec



533-5747 White



533-3277 Moon



533-5820 Quicksilver



533-3914 Bark



533-3591 Caramel



533-5703 Wrought Iron



533-6528 Clear Quartz



533-5802 Ash



533-3022 Shiitake



533-3200 Peat



533-5749 Black Onyx



533-5360 Hazy



533-4488 Olive




533-3023 Coffee Bean




533-3913 Truffle



533-3864 Desert Clay




533-6596 Ice Pink




533-3272 Iceberg



533-2698 Sterling Blue




533-4345 Honeydew




533-8269 Yukon Gold




533-1383 Pompeian Red



533-2793 Harbor Mist



533-2697 Mineral



533-4361 Lambs Ear



533-8202 Koi



533-1344 Rose Red




533-2645 Cambridge Blue




533-2621 Blue Sea



533-4510 Celery




533-8245 Cinnabar



533-1361 Beet Root



533-2694 Night Navy



533-2794 Rising Tide



533-4487 Sage




533-1373 Salsa



533-9400 Cabernet



533-2620 Evening Blue




533-2696 Skyway




533-4448 Apple Green




533-3825 Canyon




533-9378 Abyss



533-2683 Indigo




533-4303 Seaweed




533-4302 Esmeralda



Acoustics\*



Breathable  
Comfort



Recycled Bottles &  
Renewable Fibers

## Applications

Interior Upholstery

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
65% Recycled Polyester, 35% FSC/PEFC  
Certified Rayon Backing

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)\*  
BS EN ISO 12947-2 / 160,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Air Permeability:

ASTM D737

Sound Absorption:

ASTM C423

## Colorfastness

Light:

AATCC 16.3, 200 Hours, Grade 4

ISO 105 B02, Grade 6

Crocking:

AATCC 8, Grade 4-5 Wet & Dry

## Environmental

No intentionally added PFAS

SCS Indoor Advantage certified

REACH compliant

Does not contain any Red List chemicals



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

\* Acoustic applications only available in North America




[ultrafabricsinc.com](http://ultrafabricsinc.com)

Ultrafabrics® and logo, and Brisa® are registered trademarks of Ultrafabrics Inc. Made in Japan.



# Brisa Distressed — Ultrafabrics




535-3274 Coyote



535-3021 Manila




535-3480 Navajo Ivory



535-3134 Buckskin




535-3340 Desert Tan




535-3271 Koala



535-3273 Shield




535-3024 Chamois




535-3980 Waylan




535-3869 Muslin




535-5679 Iron




535-3871 Moccasin




535-3137 Saddle



535-3972 Lasso




535-4512 Prairie



535-3232 Railroad




535-3231 French Roast




535-3201 Bison




535-3976 Bridle



535-3870 Pelt




535-5773 Stormy




535-3974 Steerhide



Acoustics\*



Breathable  
Comfort



Recycled Bottles &  
Renewable Fibers

## Applications

Interior Upholstery

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
65% Recycled Polyester, 35% FSC/PEFC  
Certified Rayon Backing

### Width:

54 Inches / 137 Centimetres

### Repeat:

8"V x 10.5"H / 203mm V x 267mm H

## Performance

### Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)\*  
BS EN ISO 12947-2 / 160,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

16 Weeks  
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)  
ISO 1419 Method C (Accelerated Ageing)

Air Permeability: ASTM D737

Sound Absorption: ASTM C423

## Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4  
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

## Environmental

No intentionally added PFAS  
SCS Indoor Advantage certified  
REACH compliant  
Does not contain any Red List chemicals



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

\* Acoustic applications only available in North America



[ultrafabricsinc.com](http://ultrafabricsinc.com)

Ultrafabrics® and logo, and Brisa® are registered trademarks of Ultrafabrics Inc. Made in Japan.






# Brisa Forecast & Brisa Frontier — Ultrafabrics



393-5852 Jasper

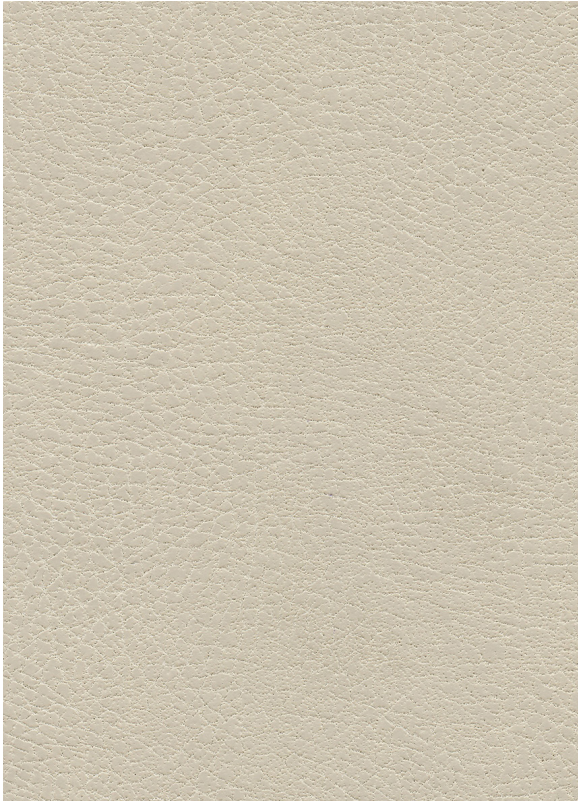


396-3361 Mohave\*




393-5750 Polar



396-3361 Mohave\*




396-3024 Chamois\*




393-4529 Glass




393-5852 Jasper




396-3134 Buckskin\*




396-3980 Waylan\*




393-4528 Sea Green



393-5875 Nimbus




396-3733 Greige\*



396-3972 Lasso\*



393-1331 Burnt Red




393-2542 Michigan Blue



393-5749 Black Onyx

\*Brisa Frontier



Outdoor Living



Breathable Comfort



Recycled Bottles & Renewable Fibers

## Applications

Interior Upholstery, Exterior Upholstery

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
65% Recycled Polyester, 35% FSC/PEFC  
Certified Rayon Backing

### Width:

54 Inches / 137 Centimetres

### Repeat:

8"V x 10.5"H / 203mm V x 267mm H

(Brisa Frontier)

## Performance

### Abrasion:

ASTM D4157 / 200,000 Double Rubs (Wyzenbeek)\*  
BS EN ISO 12947-2 / 100,000- 140,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

16 Weeks  
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)  
ISO 1419 Method C (Accelerated Ageing)

## Colorfastness

### Light:

ASTM G154, 1000 Hours

ISO 105 B02, Grade 8

### Crocking:

AATCC 8, Grade 4-5 Wet & Dry

### Chlorinated Water:

AATCC 162, Class 4-5

### Perspiration:

AATCC 15, Class 5

### Sea (Salt) Water:

AATCC 106, Class 4-5

## Environmental

No intentionally added PFAS

SCS Indoor Advantage Gold certified

REACH compliant



Brisa Forecast



Brisa Frontier

Scan QR code  
for a full list of  
specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



[ultrafabricsinc.com](https://ultrafabricsinc.com)

Ultrafabrics® and logo, and Brisa® are registered trademarks of Ultrafabrics Inc. Made in Japan.



# Ellora — Ultrafabrics



604-4023 Granola



604-3563 Dawn Mist



604-3562 Soft Almond



604-4370 Icy Pear



604-4024 Whale Bone



604-4025 Coffee Cream




604-4371 Olive Drab



604-8276 Sunset Gold



604-5388 Stone Gray



604-7247 Cloud Green




604-0024 Antique Lace




604-5385 Mourning Dove



604-3564 Roast Chestnut



604-6599 Rose Water




604-7248 Ocean Teal



604-5387 Silver Charm



604-5390 Tungsten



604-8277 Auburn




604-9438 English Violet



604-2815 Faded Denim



604-5389 Outer Space



604-5386 Black Crow



604-8278 Clay Pot




604-9437 Fine Wine




604-2814 Navy Blazer



Acoustics\*



Breathable  
Comfort



Recycled  
Water Bottles



## Applications

Interior Upholstery

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
65% Recycled Polyester, 35% Rayon Backing

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)\*

BS EN ISO 12947-2 / 160,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

### Air Permeability:

ASTM D737

### Sound Absorption:

ASTM C423

## Colorfastness

### Light:

AATCC 16.3, 200 Hours, Grade 4

ISO 105 B02, Grade 6

### Crocking:

AATCC 8, Grade 4-5 Wet & Dry

## Environmental

No intentionally added PFAS

SCS Indoor Advantage certified

REACH compliant

Does not contain any Red List chemicals



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

\* Acoustic applications only available in North America



[ultrafabricsinc.com](https://ultrafabricsinc.com)

Ultrafabrics® and logo are registered trademarks of  
Ultrafabrics Inc. Made in Japan.



# Timeless Grains


## Enduring Designs

---

These collections are expertly engineered to offer optimal durability and unrivaled softness for designs that withstand the test of time. From subtle grains to pebbled textures, these timeless fabrics will add sophisticated endurance to any project.



# Coast — Ultrafabrics

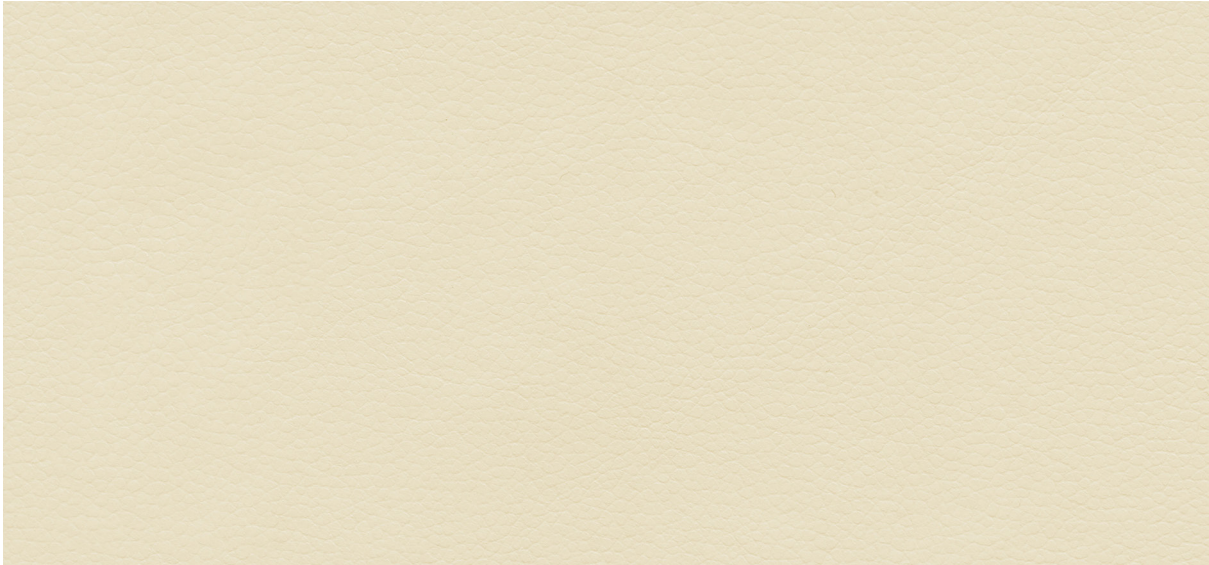

640-0042 Beacon



640-0021 Snow Cap




640-6508 Dolphin



640-3797 Conch



640-3890 Cabana



640-5968 Feather



640-2579 Glacial



640-6086 Walrus Grey



640-3880 Savanna



640-3837 Bungalow



640-2590 Raindrop



640-7230 Calypso




640-5381 Black Moor




640-3881 Dusty Earth



640-3879 Terra




640-2776 Naval Blue




640-4338 Stem Green



Antimicrobial



Outdoor Living



Recycled Bottles & Renewable Fibers

## Application

Interior Upholstery, Exterior Upholstery

Ideal for exterior marine seating and high exposure furniture applications

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
65% Recycled Polyester, 35% FSC/PEFC  
Certified Rayon Backing

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)\*

BS EN ISO 12947-2 / 180,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

## Colorfastness

### Light:

ASTM G154, 1000 Hours

SAE J2527 1500 kj, Grade 4

ISO 105 B02, Grade 8

### Crocking:

AATCC 8, Grade 4-5 Wet & Dry

### Chlorinated Water:

AATCC 162, Class 4-5

### Perspiration:

AATCC 15, Class 5

### Sea (Salt) Water:


AATCC 106, Class 4-5

## Environmental

No intentionally added PFAS

SCS Indoor Advantage Gold certified

REACH compliant



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



[ultrafabricsinc.com](http://ultrafabricsinc.com)

Ultrafabrics® and logo are registered trademarks of Ultrafabrics Inc. Made in Japan.



# Pearlized — Ultrafabrics



322-5420 Pure Silver



322-0068 Opal Dream



322-8285 Golden Ore




322-5975 Mirror



322-7228 Pink Quartz



322-9470 Lavender Agate



322-5976 Tin Man



322-3174 Mica




322-5768 Pewter



322-7225 Rose Pearl



322-1468 Ruby Crush



322-2705 Metallic Blue



322-4386 Beryl Green




322-5814 Licorice




322-8208 Spice



322-6558 Pharoah



322-2691 Midnight




322-4304 Oz





Renewable  
Fibers

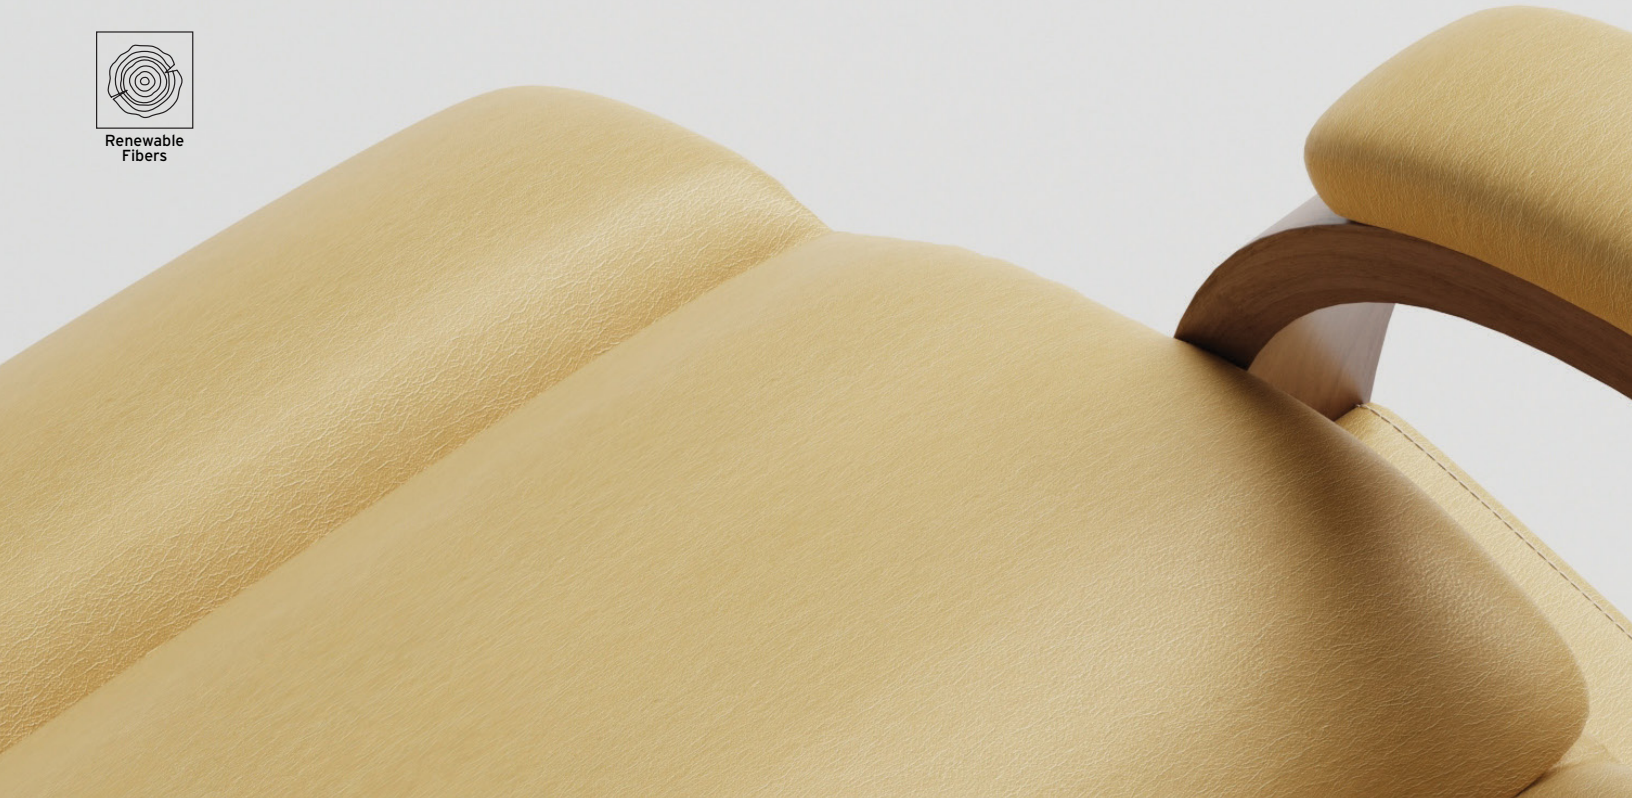

## Application

Interior Upholstery

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
100% FSC/PEFC Certified Rayon Backing

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)\*  
BS EN ISO 12947-2 / 180,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)  
ISO 1419 Method C (Accelerated Ageing)

## Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4  
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

## Environmental

No intentionally added PFAS  
SCS Indoor Advantage certified  
REACH compliant  
Does not contain any Red List chemicals



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



[ultrafabricsinc.com](https://ultrafabricsinc.com)

Ultrafabrics® and logo are registered trademarks of Ultrafabrics Inc. Made in Japan.




# Promessa — Ultrafabrics




363-5354 Galaxy Fog




363-5715 Snow




363-5818 Ash



363-5817 Shale




363-5011 Battleship




363-5845 Ebony




363-3464 Tusk




363-3463 Cocoa



363-3785 Desert Taupe




363-3391 Sparrow




363-3037 Horsehair




363-3152 Parchment




363-3142 Camel




363-2695 Aquamarine




363-7239 Aqua Spring




363-3189 Barley




363-3145 Bronze




363-2604 Stone Blue




363-7309 Malibu




363-3786 Buttered Toffee




363-1444 Fireclay




363-2792 Lake Blue




363-4362 Old Lime




363-5258 Sun Shower




363-1387 Dogwood




363-2672 Corn Flour




363-4363 Olive Moss




363-3141 Fields




363-1443 Rumba Red




363-2680 Atlantic




363-7273 Aspen Green



363-3462 Woodpecker



363-9414 Merlot



363-9387 Moroccan Fig



## Application

Interior Upholstery

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
65% Recycled Polyester, 35% FSC/PEFC  
Certified Rayon Backing

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)\*

BS EN ISO 12947-2 / 180,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

## Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4  
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

## Environmental

No intentionally added PFAS

SCS Indoor Advantage certified

REACH compliant

Does not contain any Red List chemicals



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.




[ultrafabricsinc.com](https://ultrafabricsinc.com)

Ultrafabrics® and logo are registered trademarks of Ultrafabrics Inc. Made in Japan.




# Pumice — Ultrafabrics

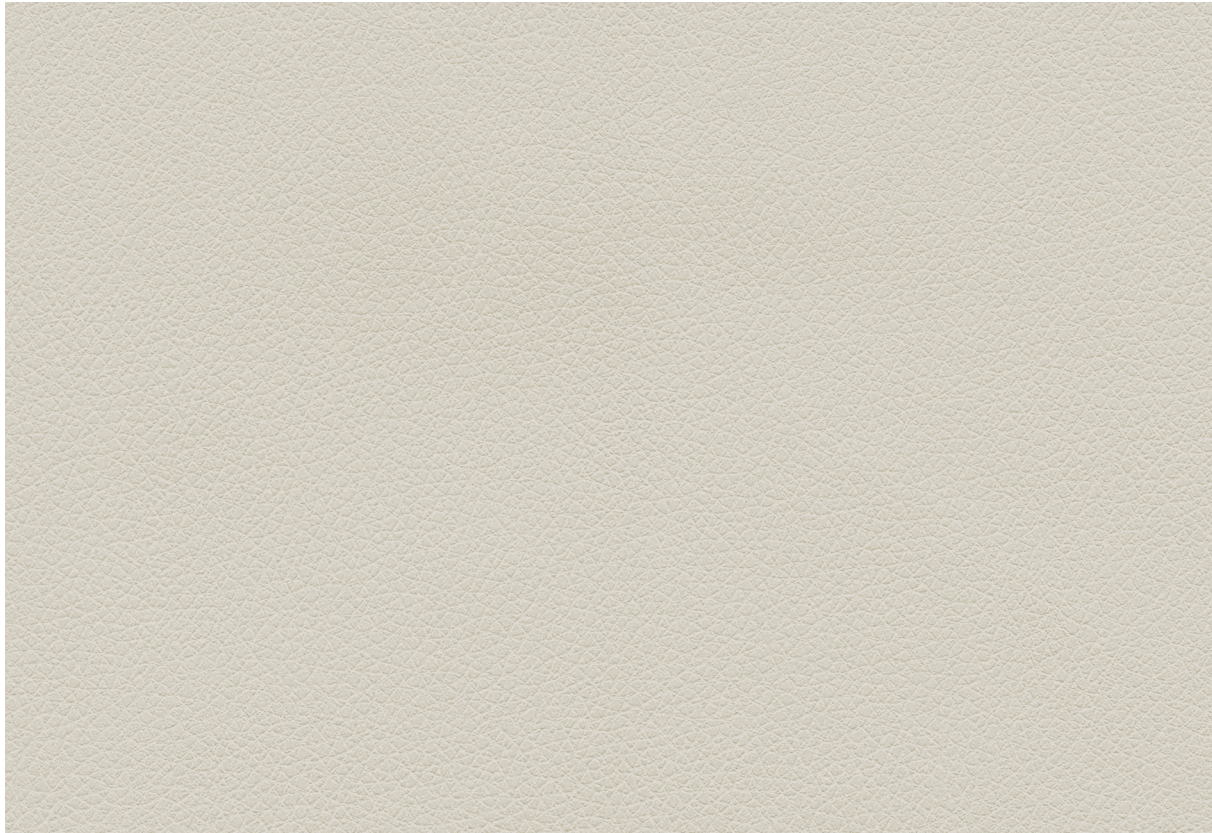


497-0017 Whitewater



497-0047 White Shore



497-3260 Seahorse



497-6601 Coral Glow




497-4372 Dusk Green



497-6533 Hail



497-5969 Propeller




497-5203 Sunbeam



497-8279 Summer Melon




497-4373 Dusty Olive



497-2818 Blue Ice




497-5394 Pewter Cast



497-4018 Oar



497-8280 Aztec Clay




497-6534 Anchor Gray




497-2778 Hightide



Antimicrobial



Outdoor Living



Recycled Bottles & Renewable Fibers

## Application

Interior Upholstery, Exterior Upholstery

Ideal for exterior marine seating and high exposure furniture applications

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
65% Recycled Polyester, 35% FSC/PEFC  
Certified Rayon Backing

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)\*

BS EN ISO 12947-2 / 200,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

## Colorfastness

### Light:

ASTM G154, 1000 Hours

SAE J2527 1500 kj, Grade 4

ISO 105 B02, Grade 8

### Crocking:

AATCC 8, Grade 4-5 Wet & Dry

### Chlorinated Water:

AATCC 162, Class 4-5

### Perspiration:

AATCC 15, Class 5

### Sea (Salt) Water:


AATCC 106, Class 4-5

## Environmental

No intentionally added PFAS

SCS Indoor Advantage Gold certified

REACH compliant



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

[ultrafabricsinc.com](http://ultrafabricsinc.com)


Ultrafabrics® and logo are registered trademarks of Ultrafabrics Inc. Made in Japan.




# Summit — Ultrafabrics



421-3270 Barro




421-3357 Cream




421-3578 Stone



Antimicrobial



Outdoor Living



Recycled Bottles & Renewable Fibers

## Application

Interior Upholstery, Exterior Upholstery

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
65% Recycled Polyester, 35% FSC/PEFC  
Certified Rayon Backing

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)\*

BS EN ISO 12947-2 / 160,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

## Colorfastness

### Light:

ASTM G154, 1000 Hours

SAE J2527 1500 kj, Grade 4

ISO 105 B02, Grade 8

### Crocking:

AATCC 8, Grade 4-5 Wet & Dry

### Chlorinated Water:

AATCC 162, Class 4-5

### Perspiration:

AATCC 15, Class 5

### Sea (Salt) Water:

AATCC 106, Class 4-5

## Environmental

No intentionally added PFAS

SCS Indoor Advantage Gold certified

REACH compliant



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



[ultrafabricsinc.com](https://ultrafabricsinc.com)

Ultrafabrics® and logo are registered trademarks of Ultrafabrics Inc. Made in Japan.





# Tottori — Ultrafabrics



601-3885 Wild Truffle




601-3418 Origami White




601-3120 Udon



601-3885 Wild Truffle




601-3386 Desert Dune




601-3886 Natural Bark



601-3400 Soba



601-5037 Classic Grey



601-5020 Black Sesame



601-3297 Soy Sauce



601-3280 Tatami Mat



601-8282 Coral Reef




601-6026 Drizzle



601-5998 Rice Paper




601-8283 Burnt Ochre



601-1404 Rouge



601-6025 Hazy Sky




601-2622 Blue Mirage




601-3348 Ginseng



601-1459 Fig Jam



601-5033 Sand Castle




601-7249 Bali Bliss




601-8281 Amber Gold




601-9356 Faded Purple




601-2595 Hot Spring




601-4346 Dark Spruce




601-3300 Terrain



601-9362 Orchid



601-2515 Shibori Blue



601-4312 Lichen



## Application

Interior Upholstery

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
65% Recycled Polyester, 35% FSC/PEFC  
Certified Rayon Backing

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)\*

BS EN ISO 12947-2 / 200,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

## Colorfastness

### Light:

AATCC 16.3, 200 Hours, Grade 4

ISO 105 B02, Grade 6

### Crocking:

AATCC 8, Grade 4-5 Wet & Dry


## Environmental

PFAS-free

SCS Indoor Advantage certified

REACH compliant

Does not contain any Red List chemicals



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.




INDOOR ADVANTAGE GOLD  
FURNITURE

[ultrafabricsinc.com](http://ultrafabricsinc.com)

Ultrafabrics® and logo are registered trademarks of Ultrafabrics Inc. Made in Japan.



# Ultraleather — Ultrafabrics

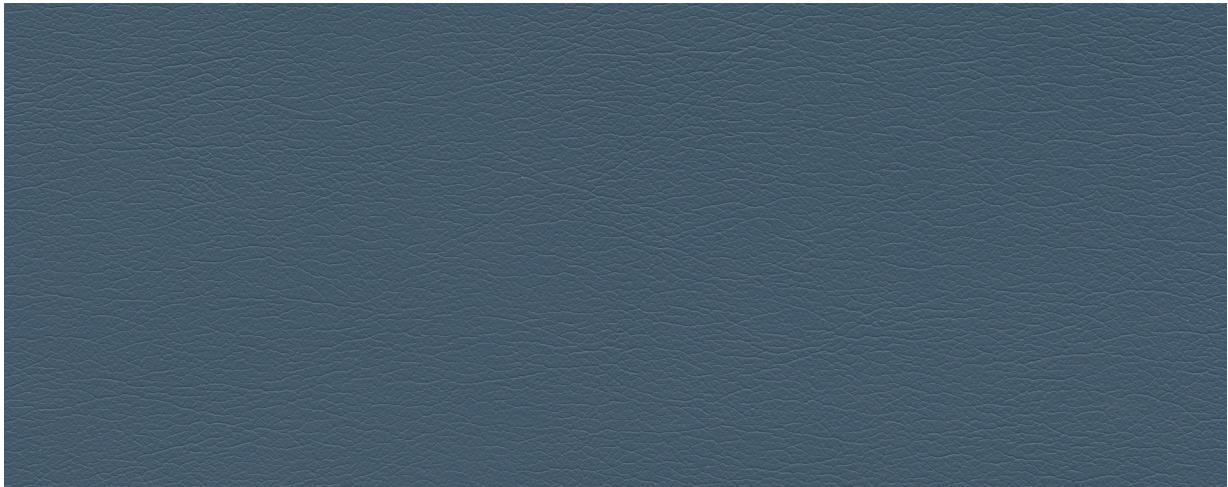

291-2716 High Seas



291-0001 White



291-5714 Ice



291-5776 Classic Grey



291-5684 Arctic



291-5805 Ermine



291-5668 Silver Pearl



291-5666 Dove Grey



291-5676 Pelican



291-3286 Moth Wing




291-3601 Doe



291-5806 Schooner



291-5040 Elephant



291-5374 Flagstone



291-3602 Stone



291-1256 Papyrus



291-5607 Raven Wing



291-5708 Granite



291-5763 Charcoal



291-3287 Cocoa Nib



291-3666 Fudge



291-3700 Ivory



291-3599 Almond



291-3455 Milkweed



291-3851 Chamois



291-3612 Curry



291-3720 Light Oyster



291-3719 Champagne



291-3609 Buff




291-8272 Citronella



291-8271 Canyon Clay




291-3729 Tan



291-3850 Sand



291-3926 Cashmere



291-5250 Sassy



291-1412 Earthenware



291-3183 Pine Cone



291-3779 Taupe



291-3778 Pecan



291-8243 Apricot



291-1347 Poppy



291-3777 Walnut



291-3523 Cave



291-3610 Hide



291-8233 Autumn Leaf



291-1176 Red



291-7214 Boysenberry




291-2508 Rain Dance



291-2553 Cyan



291-4430 Eucalyptus




291-5200 Citrus



291-1311 Brick



291-2478 Diplomat Blue



291-2527 Lagoon



291-4314 Herbal Mist



291-4460 Parrot



291-1312 Chianti



291-2556 Admiral



291-2552 Riviera



291-2507 St. John



291-4366 Olive Leaf



291-3469 Garnet



291-2551 Baltic



291-2685 Bayou



291-7234 Emerald Isle



291-4454 Sonora



291-3205 Hot Chocolate




291-9385 Plum




291-2555 Nile



291-2509 Poseidon



291-4351 Shetland



## Applications

Interior Upholstery

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
100% FSC/PEFC Certified Rayon Backing

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)\*  
BS EN ISO 12947-2 / 180,000 Rubs (Martindale)\*  
\*meets or exceeds

### Hydrolysis:

16 Weeks  
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)  
ISO 1419 Method C (Accelerated Ageing)

## Colorfastness

### Light:


AATCC 16.3, 200 Hours, Grade 4  
ISO 105 B02, Grade 6

### Crocking:

AATCC 8, Grade 4-5 Wet & Dry

## Environmental

No intentionally added PFAS  
SCS Indoor Advantage certified  
REACH compliant  
Does not contain any Red List chemicals



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



[ultrafabricsinc.com](https://ultrafabricsinc.com)

Ultrafabrics® and logo, and Ultraleather® are registered trademarks of Ultrafabrics Inc. Made in Japan.



# Ultraleather Anti-Static — **Ultrafabrics**




329-5810 Black





Anti-Static



Renewable  
Fibers

# Ultraleather Anti-Static

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
100% FSC/PEFC Certified Rayon Backing

### Weight:

Approx. 9.7 oz. Per Square Yard  
Approx. 330 Grams Per Square Metre

### Thickness:

Approx. 0.95 Millimetres

### Width:

54 Inches / 137 Centimetres

## Performance

### Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)\*  
BS EN ISO 12947-2 / 180,000 Rubs (Martindale)\*  
\*meets or exceeds

### Hydrolysis:

16 Weeks  
ASTM 3690 Sect. 6.11 (Hydrolytic Stability)  
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D751

Tensile Strength: BS EN ISO 1421

Electrical Resistivity of Fabrics: ASTM D257  
≤ 10<sup>7</sup> OHMS

## Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4  
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4.5 Wet & Dry

## Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117-2013 - Pass
- FMVSS 302 - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- IMO FTPC Part 8

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



**ultrafabricsinc.com**


Ultrafabrics® and logo, and Ultraleather® are registered trademarks of Ultrafabrics Inc. Made in Japan.  
12/24



# Ultraleather Pro IFR — Ultrafabrics



607-9348 Dusty Mauve



607-3686 Sweet Cream




607-3687 Sand Bar




607-9348 Dusty Mauve




607-6504 Harbor Fog




607-2743 Ocean Mist



607-3651 Dark Walnut




607-3652 Clay Brown



607-6505 Storm Grey



607-6065 Black Ice



607-2742 Blue Note



# Ultraleather Pro IFR

## Application

Interior Upholstery:

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
50% Modacrylic, 50% Rayon Backing

### Weight:

Approx. 350 Grams Per Square Metre

### Thickness:

Approx. 0.80 Millimetres

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

BS EN ISO 12947-2 / 120,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

### Tensile Strength:

BS EN ISO 1421

## Colorfastness

Light:

ISO 105 B02, Grade 6

## Flammability Requirements

These fabrics have been shown to perform under the fire test conditions of:

- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- BS EN 1021 Parts 1 & 2 (Cig & Match)
- IMO FTPC Part 8

## Ultraleather Pro IFR Resists:

- Ballpoint ink
- Blood
- Mustard and Ketchup
- Betadine
- Denim\*
- Red Wine

\* Removal of denim dye may vary depending on the period of time the stain sets in. While Pro offers excellent protection, full removal is not guaranteed.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



[ultrafabricsinc.com](http://ultrafabricsinc.com)

Ultrafabrics® and logo, and Ultraleather® are registered trademarks of Ultrafabrics Inc. Made in Japan.



# Modern Textures

## Statement Makers

---

For design-forward projects that demand something different. These future-focused textures have been crafted with the most advanced technology that delivers superior performance and a truly sensorial experience.



# Eco Tech — Ultrafabrics



394-3801 Gypsum




394-6540 Whisper




394-3801 Gypsum



394-3622 Limestone



394-3709 Brownstone



394-4408 Komodo



Renewable  
Fibers



## Application

Interior Upholstery

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
100% FSC/PEFC Certified Rayon Backing

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 150,000 Double Rubs (Wyzenbeek)\*  
BS EN ISO 12947-2 / 200,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)  
ISO 1419 Method C (Accelerated Ageing)

## Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4  
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

## Environmental

No intentionally added PFAS  
SCS Indoor Advantage certified  
REACH compliant  
Does not contain any Red List chemicals



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



[ultrafabricsinc.com](https://ultrafabricsinc.com)

Ultrafabrics® and logo are registered trademarks of Ultrafabrics Inc. Made in Japan.



# Volar Bio — Ultrafabrics



630-5004 Fortress



630-6549 Silverstone




630-3842 Burlap



630-5877 Porcini



630-6018 Gravity



630-4329 Matcha



630-5004 Fortress



630-3893 Bramble




630-8252 Monarch



630-2725 Macaw




630-7290 Mint




630-6073 Pitch Black




630-8258 Café Noir




630-1407 Scarlet



630-2749 Indigotin



630-4335 Spinach



Bio-based  
Ingredients



Recycled Bottles &  
Renewable Fibers

## Application

Interior Upholstery

## General Specifications

### Composition:

Proprietary Polycarbonate + Biobased Surface  
65% Recycled Polyester, 35% FSC/PEFC  
Certified Rayon Backing

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)\*

BS EN ISO 12947-2 / 200,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

### Biobased Carbon Content:

29%

ASTM D6866-18 (Method B)

ISO 16620-2; 2015

## Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4  
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

## Environmental

No intentionally added PFAS

SCS Indoor Advantage certified

REACH compliant

Does not contain any Red List chemicals

Contains a 66% mix of recycled, rapidly renewable, and  
biobased content



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



INDOOR ADVANTAGE GOLD  
FURNITURE



USDA  
CERTIFIED  
BIOBASED  
PRODUCT  
PRODUCT 29%


[ultrafabricsinc.com](https://ultrafabricsinc.com)

Ultrafabrics® and logo are registered trademarks of  
Ultrafabrics Inc. Made in Japan.







# Wired — Ultrafabrics

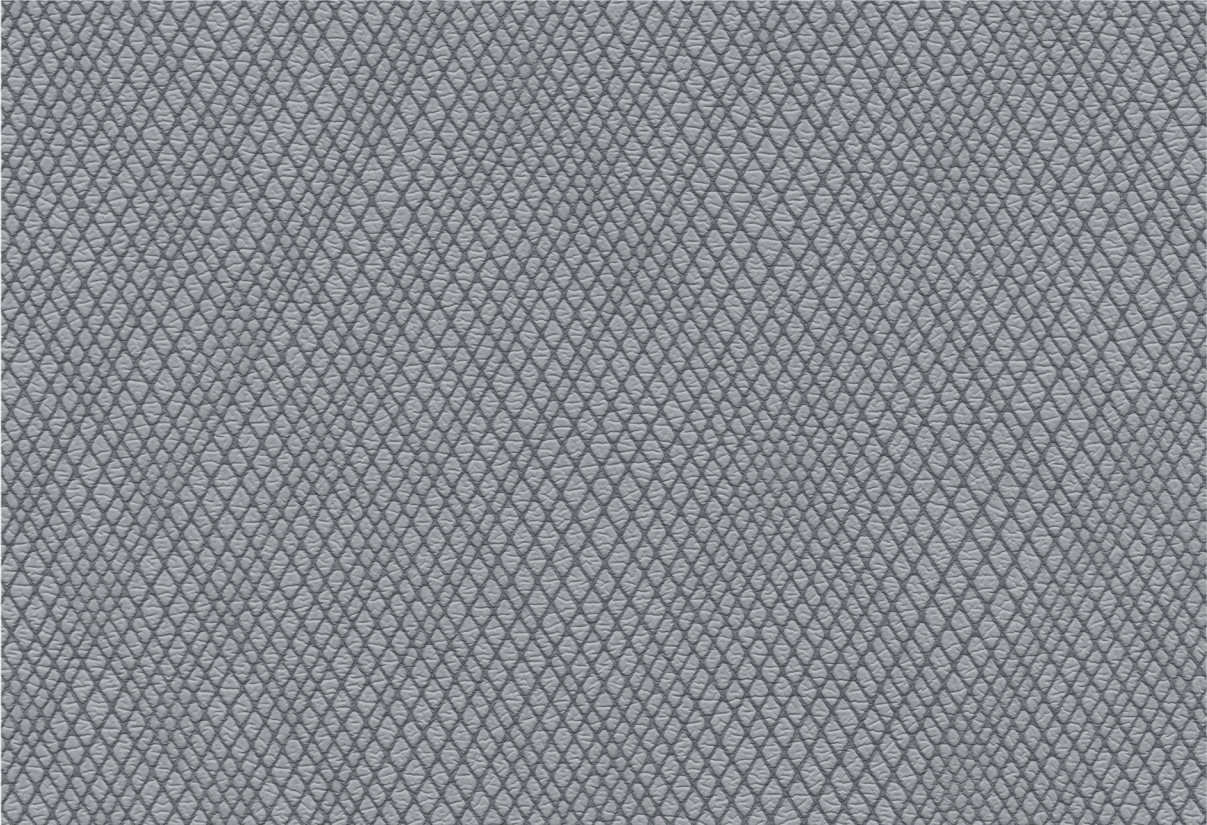

531-5309 Glisten Grey




531-3283 Butter Cookie



531-5266 Lemon Drop



531-2591 Baby Blue




531-6568 Faded Stone




531-3282 Milkshake




531-3284 Sugar Cone



531-8236 Marmalade



531-2592 Aquarius




531-6563 Dust



531-9421 Blackjack




531-3285 Kahlua




531-4306 Rio



531-2779 Hale Navy



531-9326 Acai

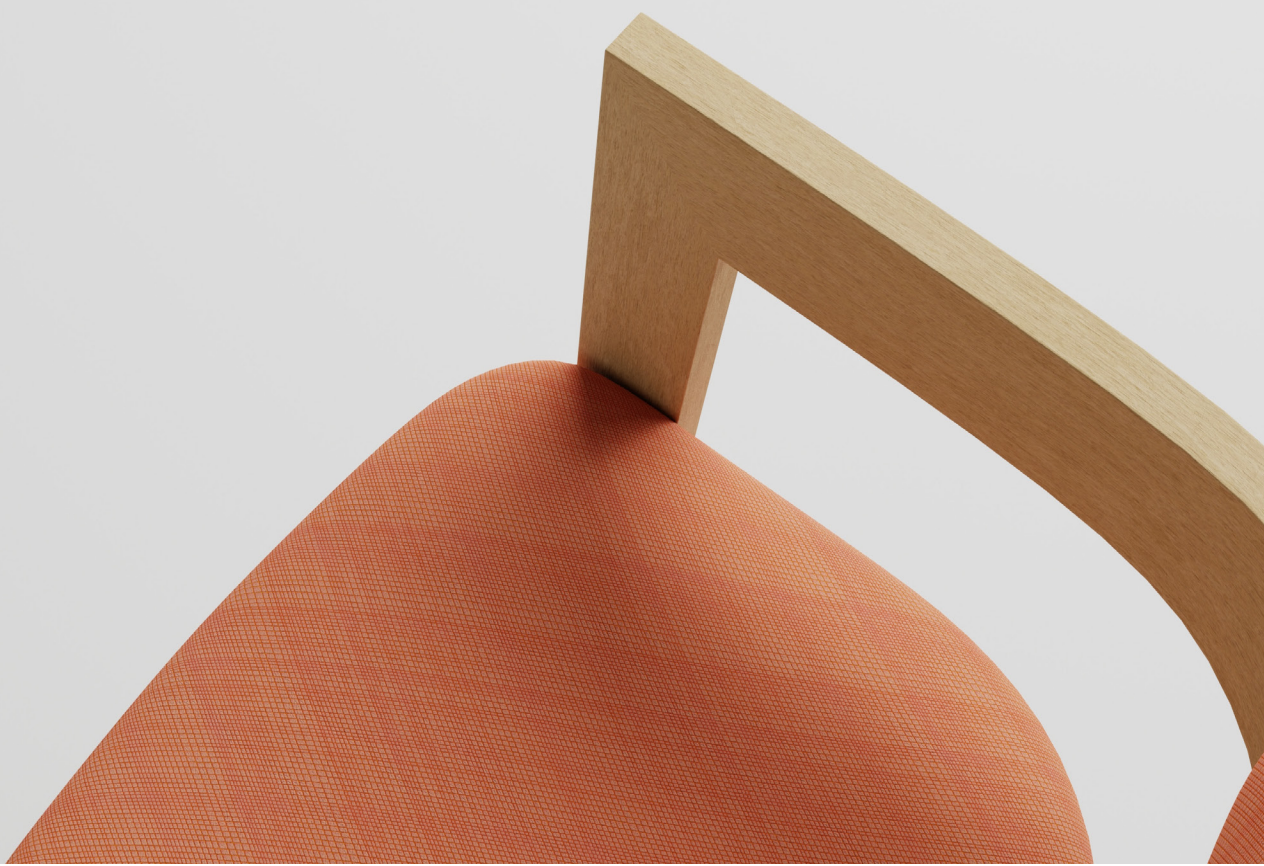

## Applications

Interior Upholstery

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
65% Recycled Polyester, 35% FSC/PEFC  
Certified Rayon Backing

### Width:

54 Inches / 137 Centimetres

### Repeat:

27.55"V x 16.61"H / 700mm V x 422mm H

## Performance

### Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)\*  
BS EN ISO 12947-2 / 200,000 Rubs (Martindale)\*  
\*meets or exceeds

### Hydrolysis:

16 Weeks  
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)  
ISO 1419 Method C (Accelerated Ageing)

## Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4  
ISO 105 B02, Grade 6  
Crocking: AATCC 8, Grade 4-5 Wet & Dry

## Environmental

No intentionally added PFAS  
SCS Indoor Advantage Gold certified  
REACH compliant  
Does not contain Red List chemicals



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



[ultrafabricsinc.com](https://ultrafabricsinc.com)

Ultrafabrics® and logo, are registered trademarks of Ultrafabrics Inc. Made in Japan.



# Uf Select


## Swift & Stylish

---

Uf Select offers a fresh take on creativity and performance for today's competitive and time-sensitive projects. Featuring an inspiring array of textures and colors, this grouping is suitable for accessories, hospitality, residential, recreational vehicles, non-clinical healthcare, and workplace.



# Concept Pro — Uf Select®



777-00153 Frostline



777-50103 Cloudburst



777-27603 Carolina



777-50073 Pediment




777-33673 Clotted Cream




777-50243 Lava Smoke



777-52443 Gold Finch



777-82753 Calendula




777-27153 Air Blue



777-72453 Aqua Sea




777-52753 Grey Goose



777-34153 Malt Ball




777-82703 Apricot Ice



777-27453 Olympic



777-72463 Biscay Bay




777-52763 Wolf




777-33893 Camouflage




777-14543 Taffy




777-28033 Ink Blue




777-43093 Lima Bean




777-52853 Black Eel




777-34773 Lentil



777-14533 Granita



777-93493 Red Cabbage



777-43173 Lawn Green

# Concept Pro — Uf Select®



**Application** Interior Upholstery

---

## General Specifications

<b>Composition</b>	Polycarbonate Blended Surface   65% Polyester, 35% Cotton Backing
<b>Weight</b>	Approx. 13.4 oz. Per Square Yard   Approx. 455 Grams Per Square Metre
<b>Thickness</b>	Approx. 0.95 Millimetres
<b>Width</b>	54 Inches   137 Centimetres
<b>Repeat</b>	None

---

## Performance

<b>Abrasion</b>	ASTM D4157 / 250,000 Double Rubs (Wyzenbeek)*   BS EN ISO 12947-2 / 200,000 Rubs (Martindale)* *meets or exceeds
<b>Hydrolysis</b>	10 Weeks   ASTM D3690 Sect. 6.11 (Hydrolytic Stability)   ISO 1419 Method C (Accelerated Ageing)
<b>Adhesion of Coating</b>	ASTM D751
<b>Tear Strength</b>	ASTM D2261
<b>Breaking Strength</b>	ASTM D751
<b>Seam Strength</b>	ASTM D751 (Tack Tear)
<b>Tensile Strength</b>	BS EN ISO 1421

---

## Colorfastness

<b>Light</b>	AATCC 16.3, 200 Hours, Grade 4   ISO 105 B02, Grade 6
<b>Crocking</b>	AATCC 8, Grade 4-5 Wet & Dry

---

## Flammability Requirements

ASTM E84 (Adhered) - Class A | CA TB 117-2013 - Pass | FMVSS 302 - Pass | NFPA 260 - Class 1 | UFAC - Class 1 | AB 2998

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:  
BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5) | BS EN 1021 Part 1 & 2 (Cig & Match) | ASTM E84 (Unadhered) - Class A

## Concept Pro Resists:

- Ballpoint ink
- Blood
- Mustard and Ketchup
- Betadine
- Denim\*
- Red Wine

Removal of denim dye may vary depending on the period of time the stain sets in. While Concept Pro offers excellent protection, full removal is not guaranteed.


For more information on our fabrics, cleaning and care instructions, please visit our website.

[ultrafabricsinc.com](http://ultrafabricsinc.com)

Ultrafabrics® and logo, and Uf Select® are registered trademarks of Ultrafabrics Inc. Made in Mexico.



# Lino — Uf Select®

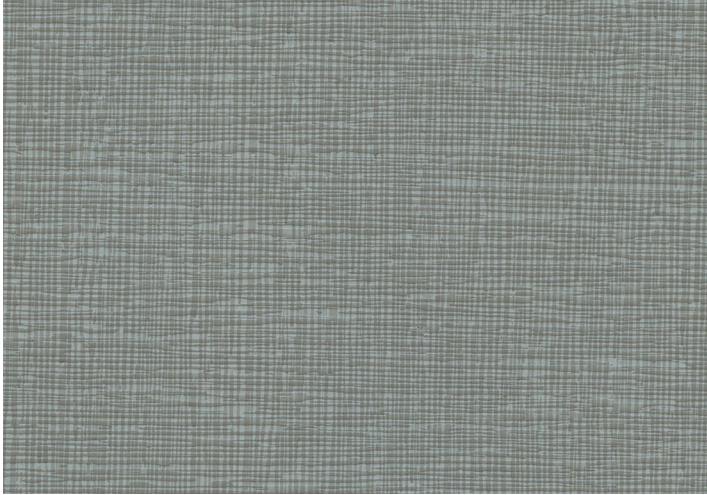

740-58733 Coin




740-34513 Haystack



740-34463 Cider



740-58733 Coin



740-82613 Yarrow




740-00503 White Marigold



740-65783 Wigwam



740-82593 Carrot



740-25143 Bosporous



740-43313 Granny Smith



740-50143 Ore




740-33793 Hearth



740-82603 Adobe Red



740-25123 Independence



740-43303 Verde




740-50193 Lead




740-34063 Trunk



740-13943 Plum Wine



740-43323 Jadite



740-43373 Pinenut

# Lino — Uf Select®

**Application** Interior Upholstery

---

## General Specifications

**Composition** Polycarbonate Blended Surface | 65% Polyester, 35% Cotton Backing

**Weight** Approx. 13.1 oz. Per Square Yard | Approx. 445 Grams Per Square Metre

**Thickness** Approx. 0.95 Millimetres

**Width** 54 Inches | 137 Centimetres

**Repeat** None

---

## Performance

**Abrasion** ASTM D4157 / 200,000 Double Rubs (Wyzenbeek)\* | BS EN ISO 12947-2 / 150,000 Rubs (Martindale)\*  
\*meets or exceeds

**Hydrolysis** 10 Weeks | ASTM D3690 Sect. 6.11 (Hydrolytic Stability) | ISO 1419 Method C (Accelerated Ageing)

**Adhesion of Coating** ASTM D751

**Tear Strength** ASTM D2261

**Breaking Strength** ASTM D751

**Seam Strength** ASTM D751 (Tack Tear)

**Tensile Strength** BS EN ISO 1421

---

## Colorfastness

**Light** AATCC 16.3, 200 Hours, Grade 4 | ISO 105 B02, Grade 6

**Crocking** AATCC 8, Grade 4-5 Wet & Dry

---

## Flammability Requirements

ASTM E84 (Adhered) - Class A | CA TB 117-2013 - Pass | FMVSS 302 - Pass | NFPA 260 - Class 1 | UFAC - Class 1 | AB 2998

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of: BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5) | BS EN 1021 Part 1 & 2 (Cig & Match)

For more information on our fabrics, cleaning and care instructions, please visit our website.

[ultrafabricsinc.com](https://www.ultrafabricsinc.com)

Ultrafabrics® and logo, and Uf Select® are registered trademarks of Ultrafabrics Inc. Made in Mexico.



# Montage — Uf Select®



744-33373 Alpaca



744-00513 White Marble



744-35723 Jojoba



744-35733 Alfalfa



744-52783 Silver Birch



744-56303 Silver Ash



744-53503 Ganache



744-53493 Ghost




744-50393 Horseradish




744-53583 Oakmoss



744-60883 Cast Iron



744-60873 Gris



744-53473 Smoke Gray



744-35573 Acacia



744-53483 Beechnut






744-35593 String




744-73323 Chimera



744-14403 Mimosa



744-53453 Gull




744-43493 Grasshopper



744-35563 Cord




744-35553 Old Penny



744-93053 Passion Fruit




744-25033 Copen Blue




744-43503 Jalapeno




744-52173 Wax




744-82663 Chutney



744-93533 Mulled Wine



744-27873 Provence



744-43253 Sorrel




744-35673 Cinnamon Toast



744-14393 Tobacco Brown



744-14233 Red Rock



744-27863 Blue Graphite



744-43243 Balsam




744-36473 Cardamom




744-14223 Firebrick



744-14423 Poinsettia Red




744-26543 Bluestone



744-72353 Beryl




744-36513 Tarmac




744-82673 Orange Pepper



744-14453 Vivid Punch



744-25063 Indigo Batik



744-72313 Bluegrass

# Montage — Uf Select®

**Application** Interior Upholstery

---

## General Specifications

**Composition** Polycarbonate Blended Surface | 65% Polyester, 35% Cotton Backing

**Weight** Approx. 13.1 oz. Per Square Yard | Approx. 445 Grams Per Square Metre

**Thickness** Approx. 0.95 Millimetres

**Width** 54 Inches | 137 Centimetres

**Repeat** None

---

## Performance

**Abrasion** ASTM D4157 / 200,000 Double Rubs (Wyzenbeek)\* | BS EN ISO 12947-2 / 150,000 Rubs (Martindale)\*  
\*meets or exceeds

**Hydrolysis** 10 Weeks | ASTM D3690 Sect. 6.11 (Hydrolytic Stability) | ISO 1419 Method C (Accelerated Ageing)

**Adhesion of Coating** ASTM D751

**Tear Strength** ASTM D2261

**Breaking Strength** ASTM D751

**Seam Strength** ASTM D751 (Tack Tear)

**Tensile Strength** BS EN ISO 1421

---

## Colorfastness

**Light** AATCC 16.3, 200 Hours, Grade 4 | ISO 105 B02, Grade 6

**Crocking** AATCC 8, Grade 4-5 Wet & Dry

---

## Flammability Requirements

ASTM E84 (Adhered) - Class A | CA TB 117-2013 - Pass | FMVSS 302 - Pass | NFPA 260 - Class 1 | UFAC - Class 1 | AB 2998

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of: BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5) | BS EN 1021 Part 1 & 2 (Cig & Match)

For more information on our fabrics, cleaning and care instructions, please visit our website.

[ultrafabricsinc.com](http://ultrafabricsinc.com)

Ultrafabrics® and logo, and Uf Select® are registered trademarks of Ultrafabrics Inc. Made in Mexico.

